

3001 S.W. 67th Ave. Ocala, FL. 34474 352.528.5566

CONTACT INFO:

WELLBILTDOORS.COM
INFO@WELLBILTDOORS.COM


OPERATOR QUESTIONNAIRE


Please complete and return

| POC Name: | Phone: | | |
|--|-----------------------------------|-----------------------------|--|
| Company: | Email: | | |
| Address: | | | |
| City: | State: | Zip: | |
| Door Location (Address): | | | |
| City: | State: | Zip: | |
| ROLLING DOOR INFO: | | | |
| Clear Opening: | pening: Actual Door Leaf Size: | | |
| Door Material: | Number of Door Leaves: | | |
| Door Manufacturer: | nufacturer: Weight per Door Leaf: | | |
| HERCUL-EZE™ OPERATOR (RUBBER TIRE): | ZEUS™ OPERATOR (STEEL WHEEL): | CAPACITY PER UNIT: | |
| 200 Series | 2000 Series (2 HP) | 22,000 LB Capacity per Unit | |
| 300 "XP" Series | 3000 Series (3 HP) | 40,000 LB Capacity per Unit | |
| 500 Series | 5000 Series (5 HP) | 60,000 LB Capacity per Unit | |
| ELECTRICAL INFO: | | | |
| Required Voltage: 208 | v 230v | 460v 480v | |
| Desired Phase: 1 Pl | nase 3 Phase | | |
| Overhead Electrical System: | | | |
| Soil stop Made holey We rope We rope de Troe date one End trolly Too state one | | | |
| Festoon Cable | Overhead Conductor | Drape Wire | |

Stacking Style (Choose one): -1 Operator total -Only one rail goes full length of the door ONEWAY STACK -2 Operators total -Only one rail goes full length of the door BIPARTING STACK -4 Operators total -ALL rail goes full lenth of the door BIPARTING FLOATING GROUP -2 Operators total -ALL rail goes full lenth of the door ONEWAY FLOATING GROUP -Number of operators is equal to number of panels -ALL rail goes full length of the door Key: Rail: Panel: INDEPENDENTLY POWERED [Operator: Note: Operator count does not change based on number of panels unless noted. Control Scheme: First Choose between Manual and Automatic. (Automatic scheme can be controlled by remote or smart phone). **AUTOMATIC MANUAL** Constant Contact to open and close door - Momentary contact - Pash Button - Push Button Walk with door Pendant Stations Door opens Automatically Manual or automatic Close available **AUTOMATIC: AUTOMATIC:** REMOTE CONTROL **SMART PHONE CONTROL** Hand Held Transmitter Single Touch Control with Smart Phone **CAUTION** AUTOMATIC, REMOTE, AND SMART PHONE CONTROL SHOULD ONLY BE USED WITH SUFFICIENT SAFETY **DEVICES (I.E. PHOTO EYE SENSOR OR SAFE EDGE)**



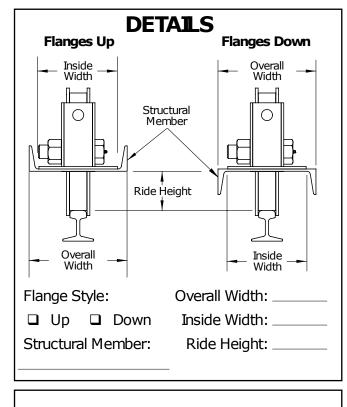

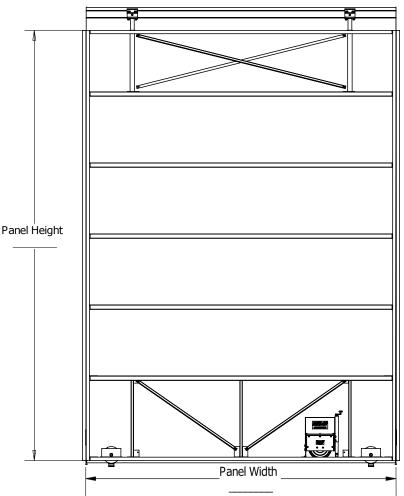

OPERATOR MOUNTING STYLE

☐ Inside Door (ID) ☐ Outside Door (OD)

Note: For bottom members with a width of 8 in. or less, an OD Mounted Operator may be recommended.

